


**Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

### LAMP INSTALLATION AND ASSEMBLY


1. Shut off power to the outlet box. (fig. A)
2. Adjust the steel cables and cords to the desired length, and reserve extra steel cables and cords in the canopy.
3. Screw the stems into the holes on LED housing, and place the glass onto the shoulders on the stems.
4. Attach mounting plate to the outlet box, secure with outlet box screws. Use anchors and wood screws for extra support (included).
5. Attach the safety hook in the canopy to one of the holes on the mounting plate.
6. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
7. Install canopy to mounting plate by inserting the pins on the canopy into slots on mounting plate. Slide the canopy to the side, tighten the countersunk screw to lock.
8. Adjust the lengths of the cords and cables to level the fixture.
9. Restore power to the fixture.

**Note: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) type dimmers only.**

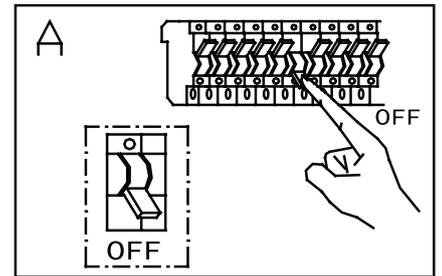

### CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.  
 Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

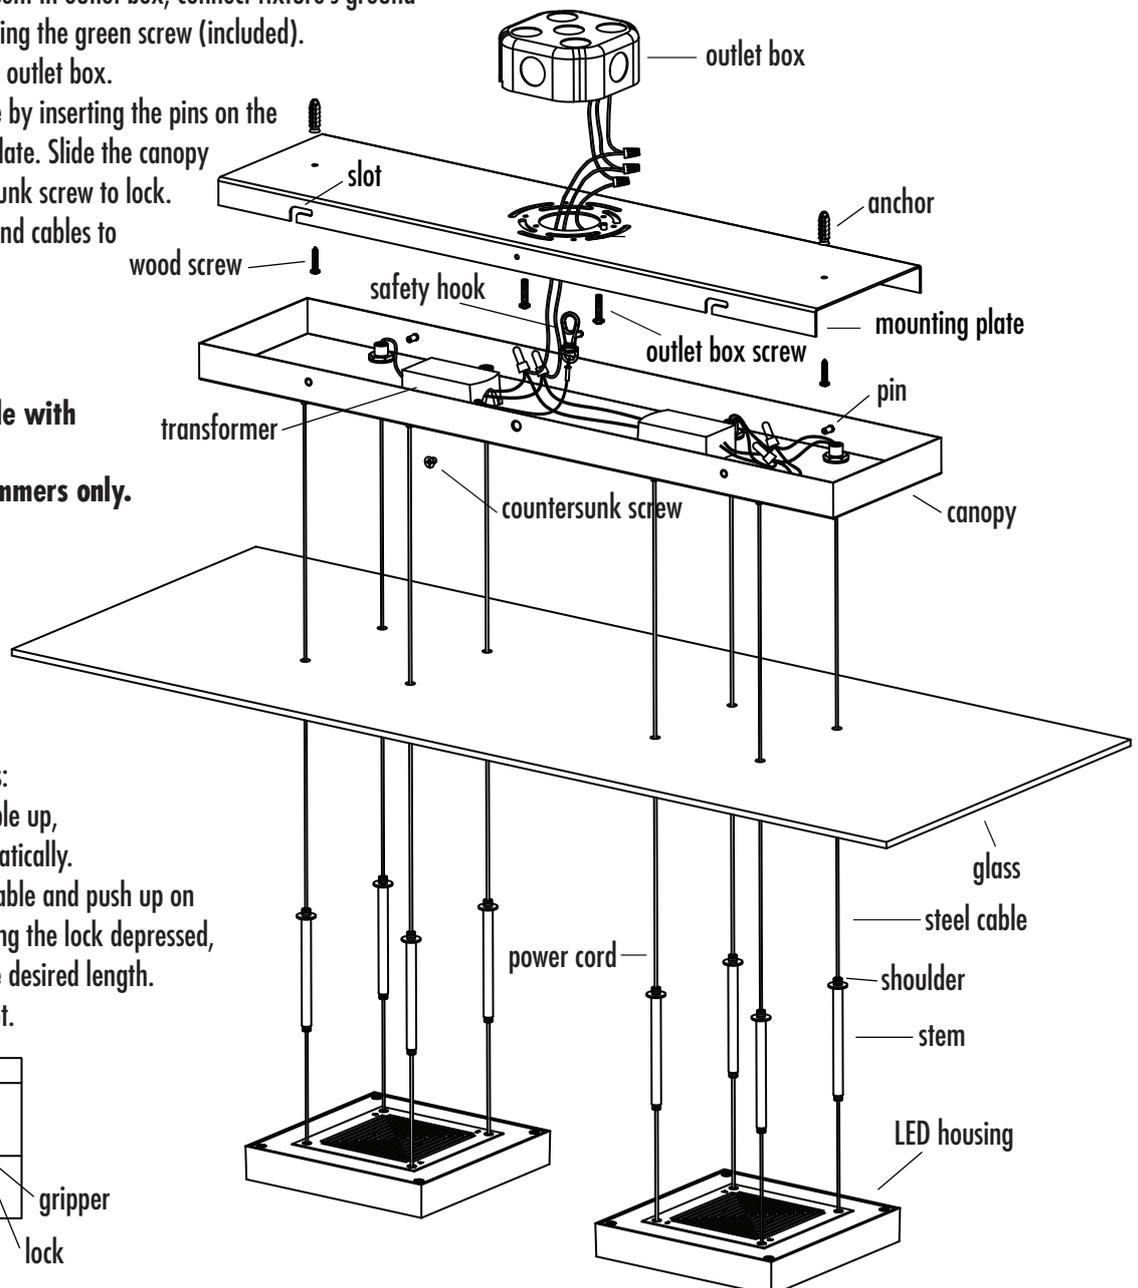

### Cord/Cable adjustment instructions:

To shorten - Just push the cord/cable up, it will be locked automatically.

To lengthen - Lift up on the cord/cable and push up on the lock. While keeping the lock depressed, lower the cable to the desired length. Release the lock to set.

