

PRODUCT DATA SHEET

Tolomeo Micro Table LED 3000K



DESIGN BY:

Michele De Lucchi , Giancarlo Fassina
2010

MATERIALS:

Aluminium, steel

DESCRIPTION:

Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light flow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminium; joints and supports in polished aluminium. System of spring balancing. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two independent lamp units to be fitted. Possibility to mount LED source on E14 Socket

SELECT

LED

Base

Aluminium

PRODUCT CODE

A011900

Light emission

IP20



TECHNICAL DATA SHEET


FEATURES

Product name:	Tolomeo Micro Table LED 3000K
Article Code:	A011900
Colour:	Aluminium
Material:	Aluminium, steel
Series:	Design

DIMENSIONS

Length:	cm 45
Height:	cm 37
Base Diameter:	cm 17
Max Extension Height:	cm 73
Max Extension Length:	cm 69
Glow Wire Test:	750 °

DIMENSIONS



COLOUR




LAMPS INCLUDED

Category:	LED COB
Number:	1
Watt:	9W
Color temperature (K):	3000K
Class:	A

LUMINAIR

Watt:	9W
Voltage:	24V
Luminous Flux (lm):	461lm
CCT:	3000K
Efficiency:	63%
Efficacy:	51lm/W
CRI:	90
Dimmer Typology:	Microswitch Dimmer

Polar curve

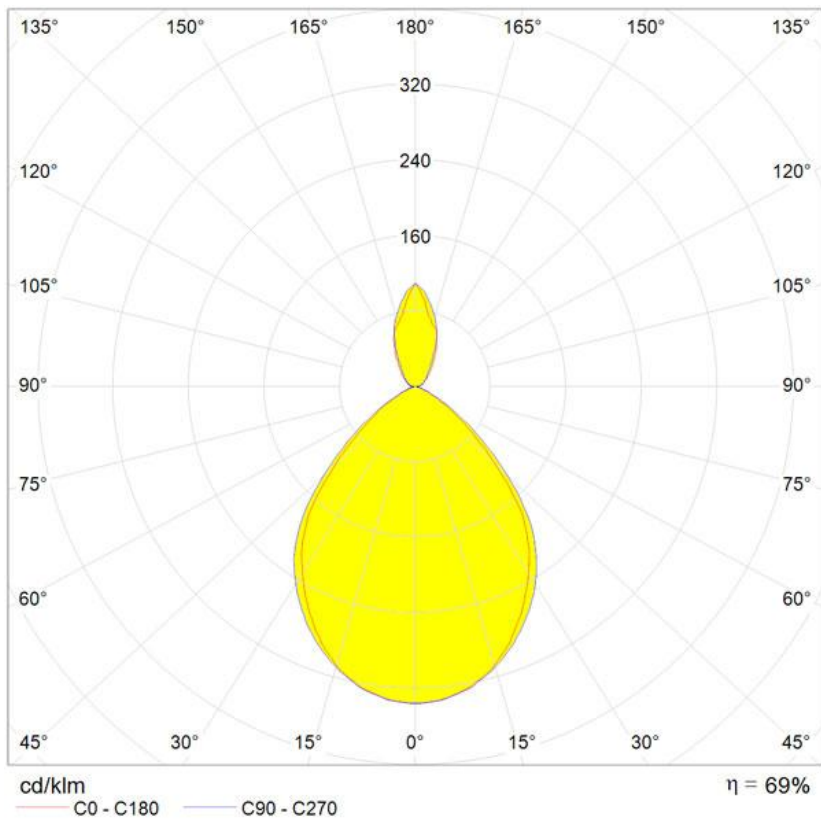

Cartesian diagram

