


## Più alto »cc« datasheet

LED ceiling spotlight with single-sided light output. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R).

Version for fitting on hollow ceiling box or ceiling box with remote power supply unit, connection to external power source (driver). Dimmable via customer-supplied dimmable power supply unit. Thanks to the special fastening technology, it can be rotated through 360° and pivoted by 52° using the integrated joint. Can be fixed in a vertical position for use as a downlight. Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.

Other versions: Più piano and piano in (recessed spotlight), Più alto 3d (surface-mounted spotlight with 3d joint). Surface-mounted spotlight also available as a track-mounted spotlight.

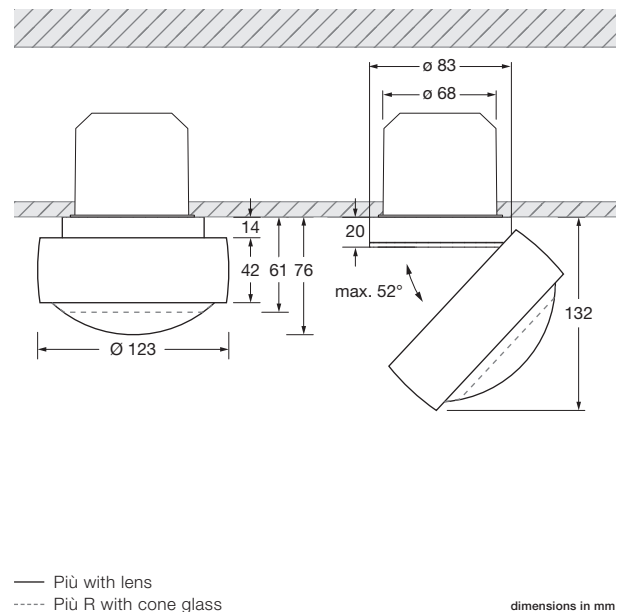

### technical data Più alto »cc«

properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass		
	turning range body	360° (with stop)		
	mobility head	52° (with stop)		
	weight	1 kg		
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black		
	base	shiny chrome, matt chrome, matt white, matt black		
	lens	matt white, matt black (lens edge)		
	cone glass	rose gold, bronze, shiny chrome, matt chrome matt white, matt black		
Occhio light module	average life time	> 50.000 hrs		
	energy efficiency class	A ++ / A +		
	power	26 W		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K	
	recommended use	residential and commercial	commercial	
electricity	dimming	by trailing-edge phase-cut dimmer, button or DALI (depending on power supply unit)		
	power supply unit	remote, operation via constant-current source, max. 700 mA / > 36 V DC		
	permitted operating conditions	max. 30°C for indoor use only		





## Più alto »cc« overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30
small lens low						
small lens medium						
satinised glass						
soft edge glass						
fresnel lens						
color filter (optional)						
lens						

Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più alto »cc«  
Più lighting effects

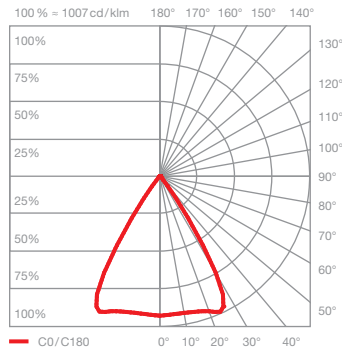
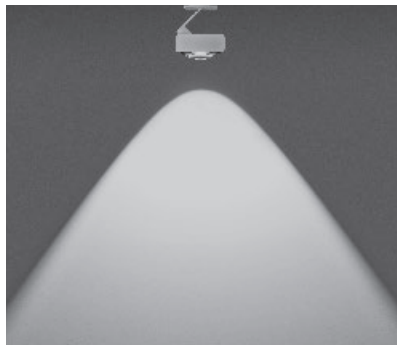


### C80 contour

scattered light with contour beam angle (approx. 80°)

inserts: lens

luminous flux:	perfect color	26 W	1640 lm
	high flux	26 W	2240 lm
	perfect color	18 W	1200 lm
	high flux	18 W	1640 lm

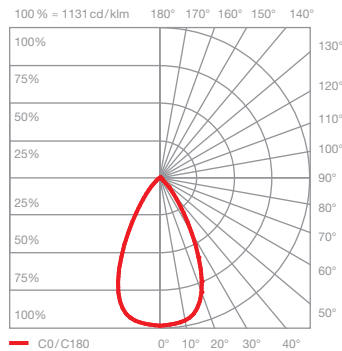
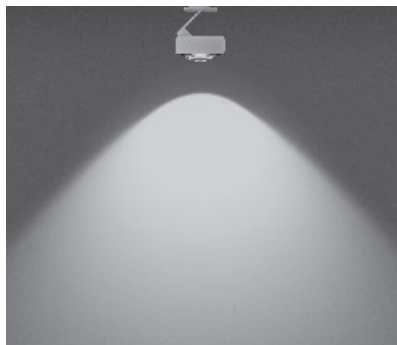


### S100 soft

scattered light with soft contour beam angle (approx. 100°)

inserts: lens  
satinised glass

luminous flux:	perfect color	26 W	1260 lm
	high flux	26 W	1720 lm
	perfect color	18 W	920 lm
	high flux	18 W	1260 lm

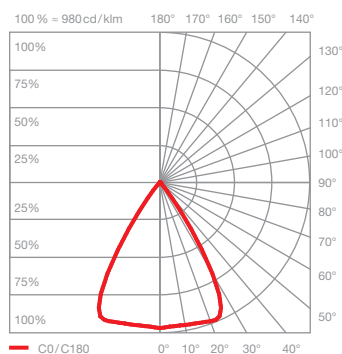
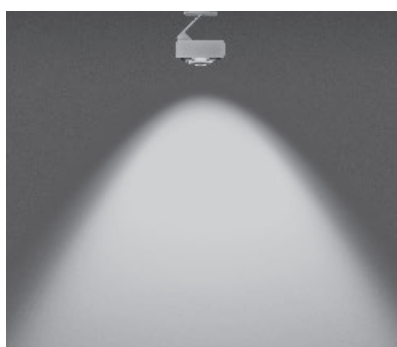


### S80 soft

scattered light with soft contour beam angle (approx. 80°)

inserts: lens  
soft edge glass

luminous flux:	perfect color	26 W	1420 lm
	high flux	26 W	1930 lm
	perfect color	18 W	1030 lm
	high flux	18 W	1420 lm

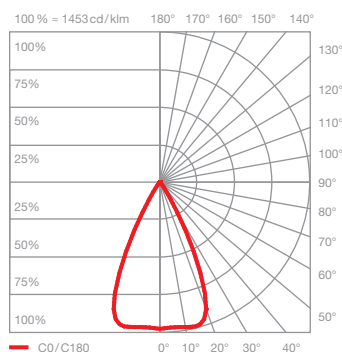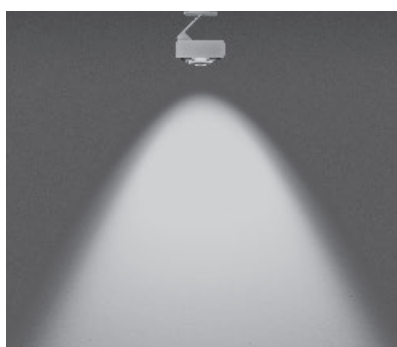



### S60 soft

scattered light with soft contour beam angle (approx. 60°)

inserts: lens  
small lens low  
soft edge glass

luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm
	perfect color	18 W	1170 lm
	high flux	18 W	1610 lm

Più alto »cc«  
Più lighting effects

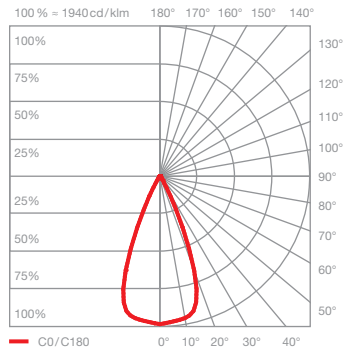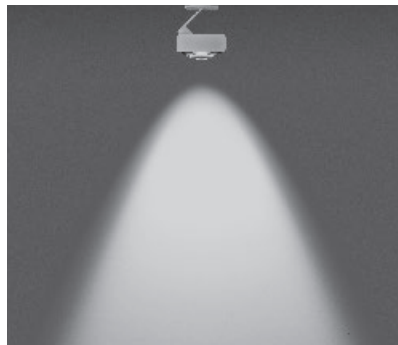


### S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens  
small lens medium  
soft edge glass

luminous flux:	perfect color	26W	1680lm
	high flux	26W	2300lm
	perfect color	18W	1230lm
	high flux	18W	1680lm

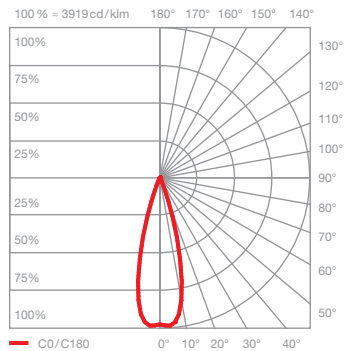


### S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens  
small lens medium  
fresnel lens

luminous flux:	perfect color	26W	1650lm
	high flux	26W	2250lm
	perfect color	18W	1200lm
	high flux	18W	1650lm



Più alto »cc«  
Più R lighting effects

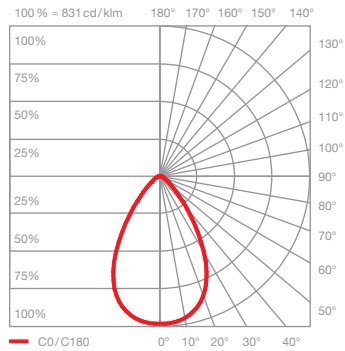

**B diffus**  
diffused light

inserts: cone glass  
small lens low  
satinised glass



luminous flux:	perfect color	26 W	1370 lm
	high flux	26 W	1870 lm
	perfect color	18 W	1000 lm
	high flux	18 W	1370 lm

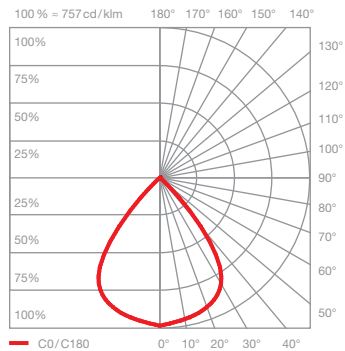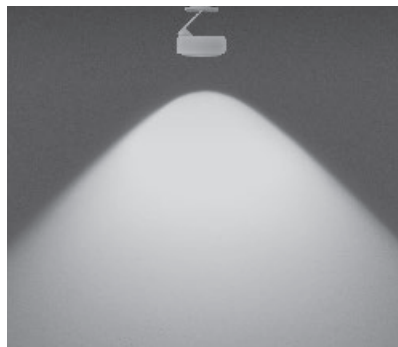

**C100 contour**  
scattered light with contour beam angle  
(approx. 100°)

inserts: cone glass  
small lens low



luminous flux:	perfect color	26 W	1680 lm
	high flux	26 W	2290 lm
	perfect color	18 W	1220 lm
	high flux	18 W	1680 lm

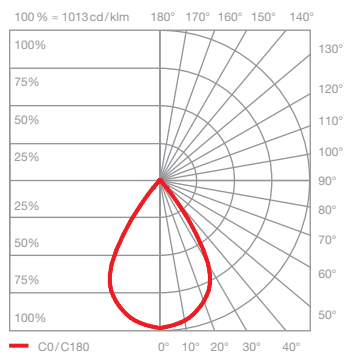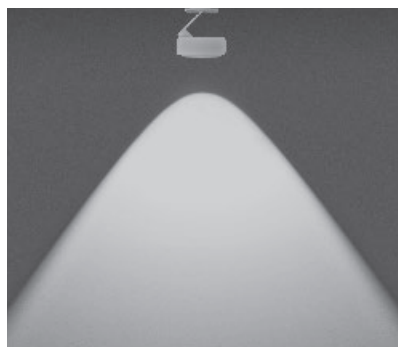

**C80 contour**  
scattered light with contour beam angle  
(approx. 80°)

inserts: cone glass  
small lens medium

luminous flux:	perfect color	26 W	1810 lm
	high flux	26 W	2460 lm
	perfect color	18 W	1310 lm
	high flux	18 W	1810 lm

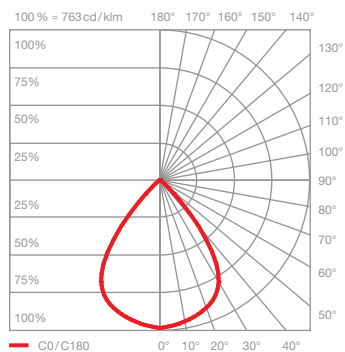
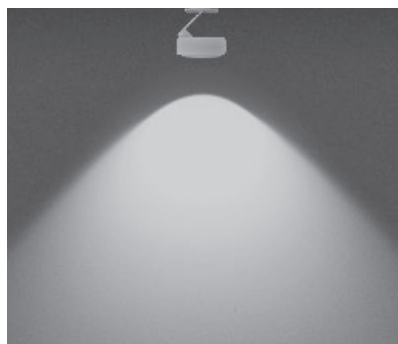


**S100 soft**  
scattered light with soft contour beam angle  
(approx. 100°)

inserts: cone glass  
small lens low  
soft edge glass

luminous flux:	perfect color	26 W	1520 lm
	high flux	26 W	2070 lm
	perfect color	18 W	1100 lm
	high flux	18 W	1520 lm



Più alto »cc«  
Più R lighting effects

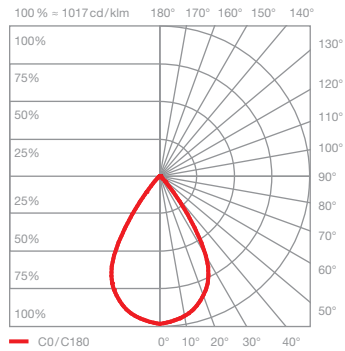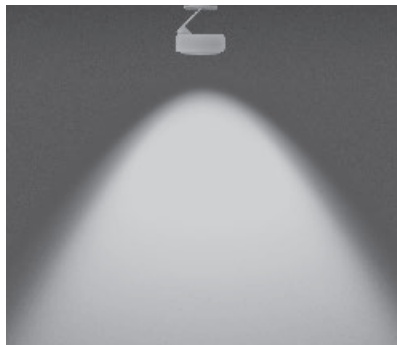

**S80 soft**  
scattered light with soft contour beam angle  
(approx. 80°)

inserts: cone glass  
small lens medium  
soft edge glass



luminous flux:	perfect color	26W	1690lm
	high flux	26W	2310lm
	perfect color	18W	1230lm
	high flux	18W	1690lm

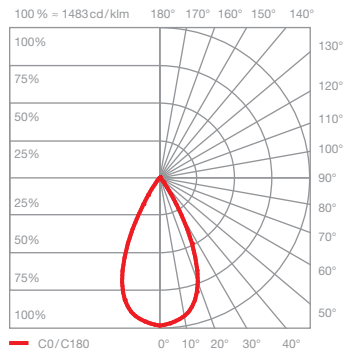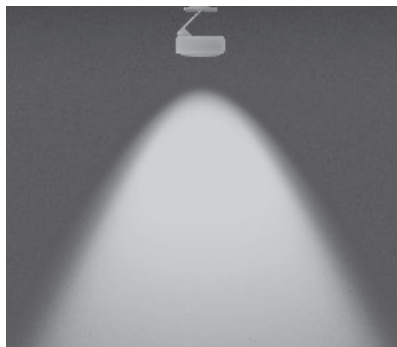

**S60 soft**  
scattered light with soft contour beam angle  
(approx. 60°)

inserts: cone glass  
small lens high  
soft edge glass


luminous flux:	perfect color	26W	1610lm
	high flux	26W	2200lm
	perfect color	18W	1170lm
	high flux	18W	1610lm

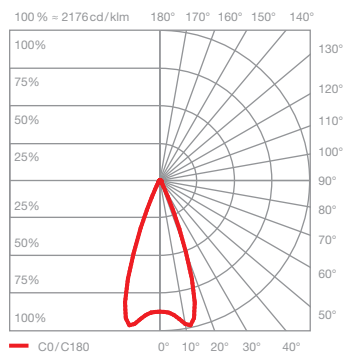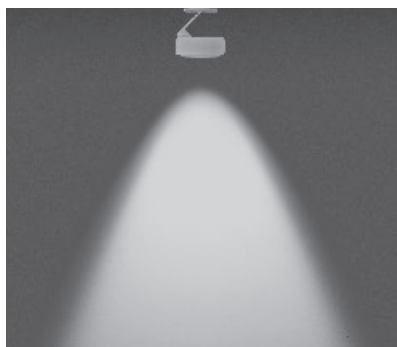

**S40 soft**  
scattered light with soft contour beam angle  
(approx. 40°)

inserts: cone glass  
small lens medium  
fresnel lens

luminous flux:	perfect color	26W	1600lm
	high flux	26W	2190lm
	perfect color	18W	1170lm
	high flux	18W	1600lm

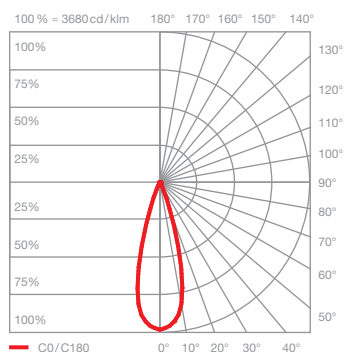

**S30 soft**  
scattered light with soft contour beam angle  
(approx. 30°)

inserts: cone glass  
small lens high  
fresnel lens

luminous flux:	perfect color	26W	1560lm
	high flux	26W	2130lm
	perfect color	18W	1140lm
	high flux	18W	1560lm