


Più piano »cc« datasheet

LED recessed spotlight for hollow ceilings or solid ceilings with ceiling box. Mounting flush with ceiling (Più piano) and recessed installation (Più piano in) are both possible. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R).

Version with remote power supply unit, connection to external power source (driver). Dimmable via customer-supplied dimmable power supply unit. Head can be aligned in any direction thanks to the ball joint principle (Più piano: 30°, Più piano in: 20°). Choice of several variants for different installation solutions. Covers that are held in place magnetically are used in ceiling-mounted versions and in frameless models which either have a mounting plate or are mounted on panels that are accessible from the rear (used in hollow ceilings). Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.

Other versions: Più alto (surface-mounted spotlight with integrated joint, pivotable by 52°), Più alto 3d (surface-mounted spotlight with 3d joint). Surface-mounted spotlight also available as a track-mounted spotlight.

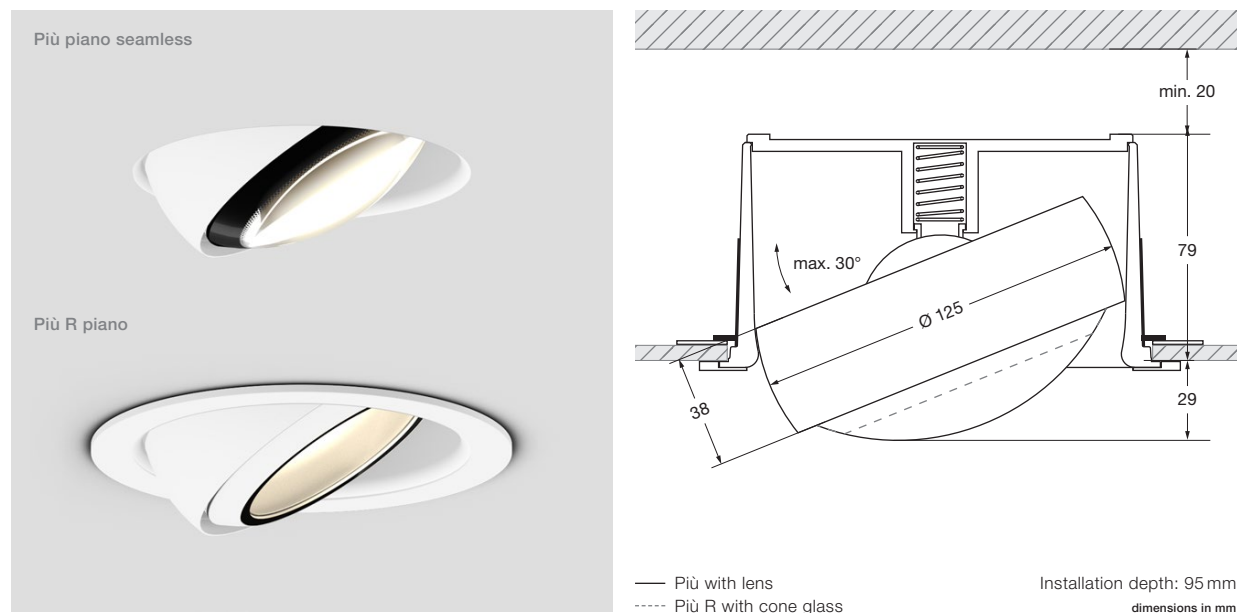

technical data Più piano »cc«


properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass		
	turning range body	360°		
	mobility head	30° (with stop)		
	weight	1.3 kg		
surface	head / cover	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black		
	tube	matt white, matt black		
	lens	matt white, matt black (lens edge)		
	cone glass	rose gold, bronze, shiny chrome, matt chrome, matt white, matt black		
Occhio light module	average life time	> 50.000 hrs		
	energy efficiency class	A ++ / A +		
	power	26 W		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K	
	recommended use	residential and commercial	commercial	
electricity	dimming	by trailing-edge phase-cut dimmer, button or DALI (depending on power supply unit)		
	power supply unit	remote, operation via constant-current source max. 700 mA / > 36 V DC		
	permitted operating conditions	max. 30°C for indoor use only		




Più piano » cc «

30° swivel angle
360° rotatability



Più piano
head H38 mm, ø 125 mm



mounting tube with cover

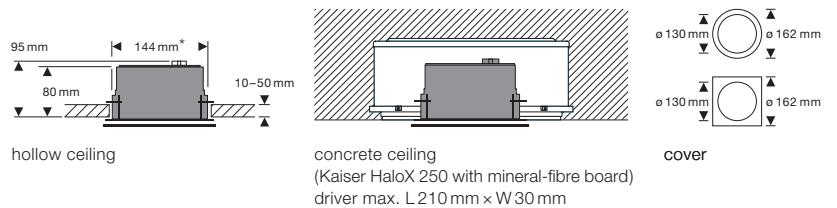


mounting tubes with doppio cover

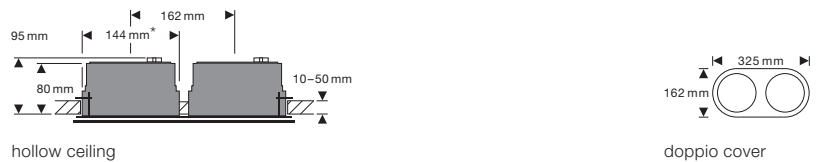


Più piano seamless
head H38 mm, ø 125 mm





holding ring for panel for seamless mounting

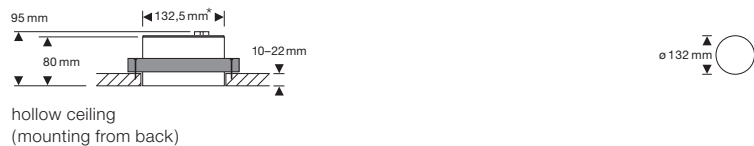

flush-mount ring for seamless mounting

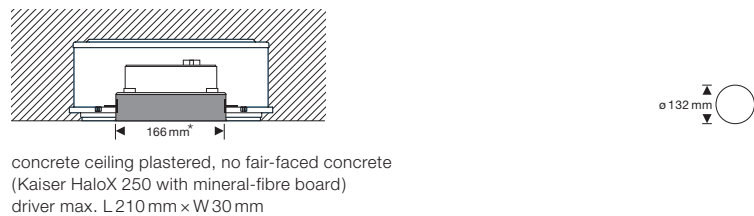

mounting board for seamless mounting

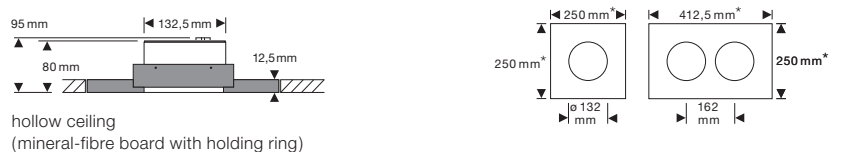



*cut-out dimensions

Più piano »cc« overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30
small lens low						
small lens medium						
satinised glass						
soft edge glass						
fresnel lens						
color filter (optional)						
lens						

Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più piano »cc«
Più lighting effects

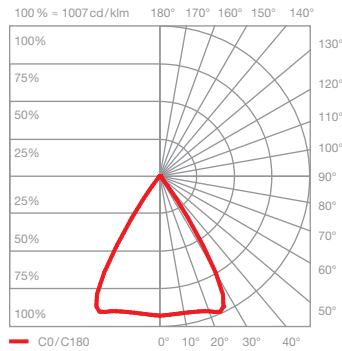
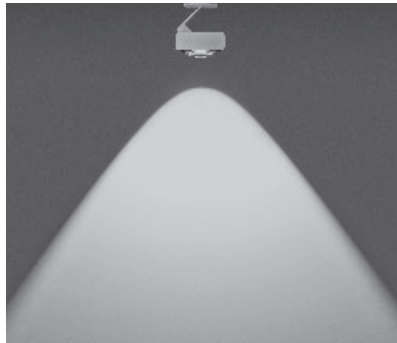


C80 contour

scattered light with contour beam angle
(approx. 80°)

inserts: lens

luminous flux:	perfect color	26 W	1640 lm
	high flux	26 W	2240 lm
	perfect color	18 W	1200 lm
	high flux	18 W	1640 lm

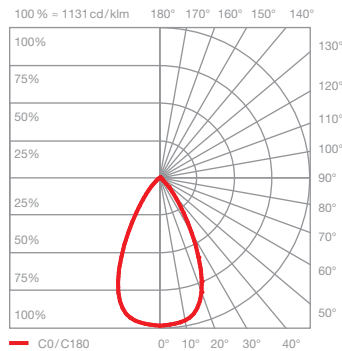
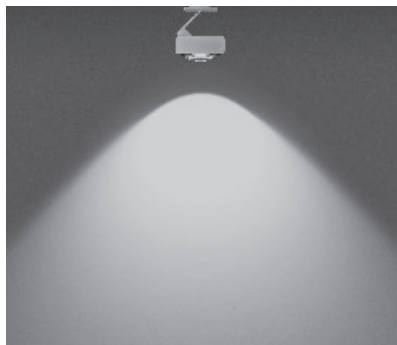


S100 soft

scattered light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass

luminous flux:	perfect color	26 W	1260 lm
	high flux	26 W	1720 lm
	perfect color	18 W	920 lm
	high flux	18 W	1260 lm

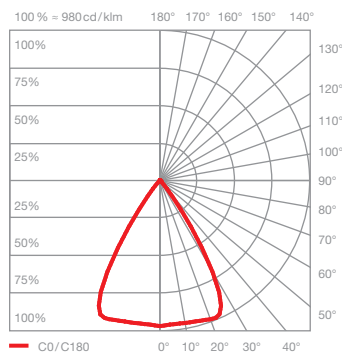
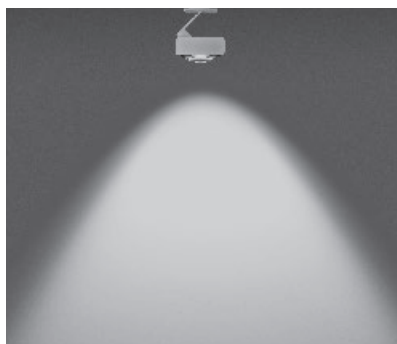


S80 soft

scattered light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass

luminous flux:	perfect color	26 W	1420 lm
	high flux	26 W	1930 lm
	perfect color	18 W	1030 lm
	high flux	18 W	1420 lm

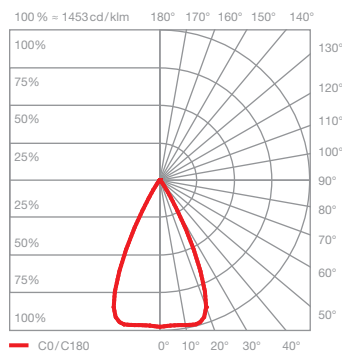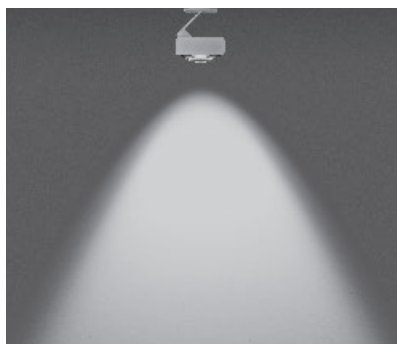



S60 soft

scattered light with soft contour beam angle
(approx. 60°)

inserts: lens
small lens low
soft edge glass

luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm
	perfect color	18 W	1170 lm
	high flux	18 W	1610 lm

Più piano »cc«
Più lighting effects

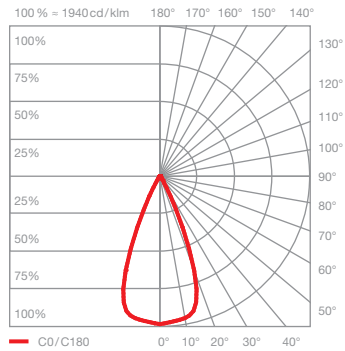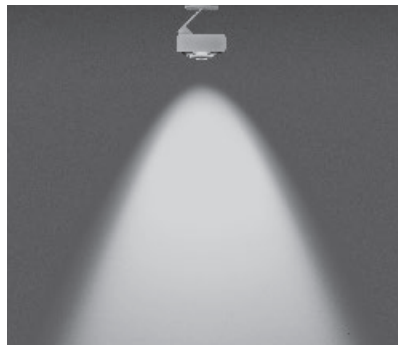


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens
small lens medium
soft edge glass

luminous flux:	perfect color	26W	1680lm
	high flux	26W	2300lm
	perfect color	18W	1230lm
	high flux	18W	1680lm

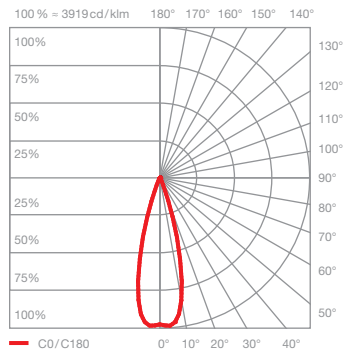


S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens
small lens medium
fresnel lens

luminous flux:	perfect color	26W	1650lm
	high flux	26W	2250lm
	perfect color	18W	1200lm
	high flux	18W	1650lm



Più piano »cc« Più R lighting effects



B diffus diffused light

inserts: cone glass
small lens low
satinised glass



luminous flux:	perfect color	26 W	1370 lm
	high flux	26 W	1870 lm
	perfect color	18 W	1000 lm
	high flux	18 W	1370 lm

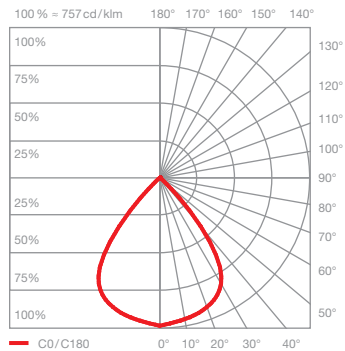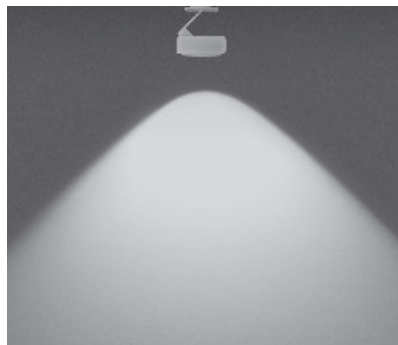

C100 contour scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low



luminous flux:	perfect color	26 W	1680 lm
	high flux	26 W	2290 lm
	perfect color	18 W	1220 lm
	high flux	18 W	1680 lm

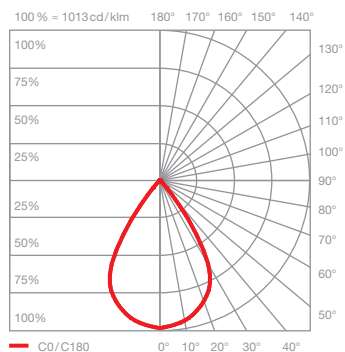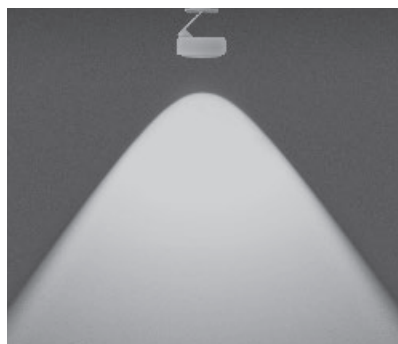

C80 contour scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux:	perfect color	26 W	1810 lm
	high flux	26 W	2460 lm
	perfect color	18 W	1310 lm
	high flux	18 W	1810 lm

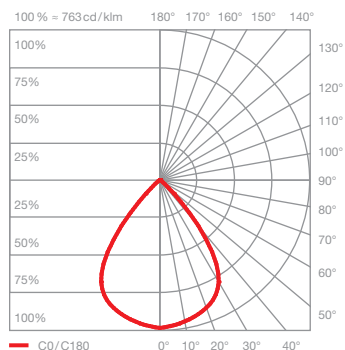
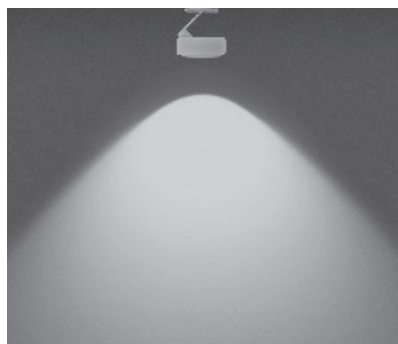


S100 soft scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux:	perfect color	26 W	1520 lm
	high flux	26 W	2070 lm
	perfect color	18 W	1100 lm
	high flux	18 W	1520 lm

Più piano »cc« Più R lighting effects

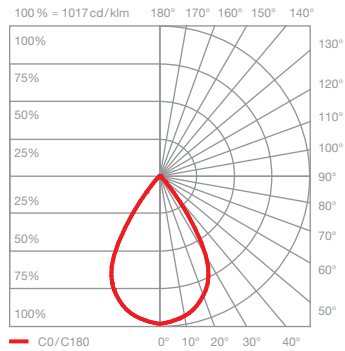
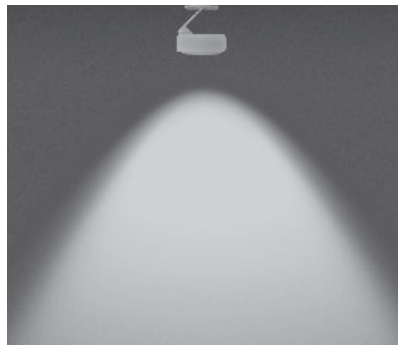


S80 soft

scattered light with soft contour beam angle (approx. 80°)

inserts: cone glass
small lens medium
soft edge glass

luminous flux:	perfect color	26W	1690lm
	high flux	26W	2310lm
	perfect color	18W	1230lm
	high flux	18W	1690lm

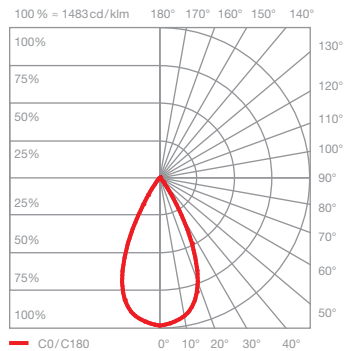
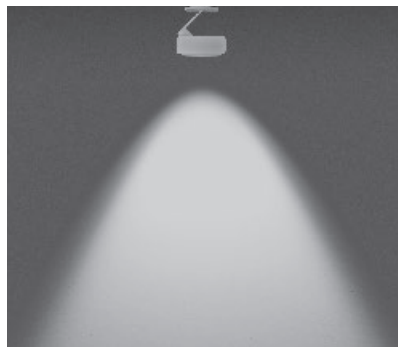


S60 soft

scattered light with soft contour beam angle (approx. 60°)

inserts: cone glass
small lens high
soft edge glass

luminous flux:	perfect color	26W	1610lm
	high flux	26W	2200lm
	perfect color	18W	1170lm
	high flux	18W	1610lm

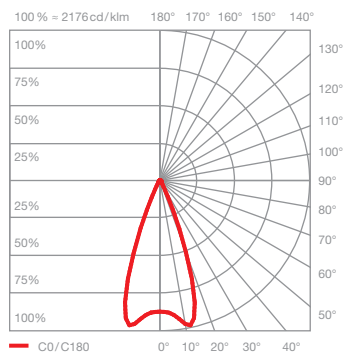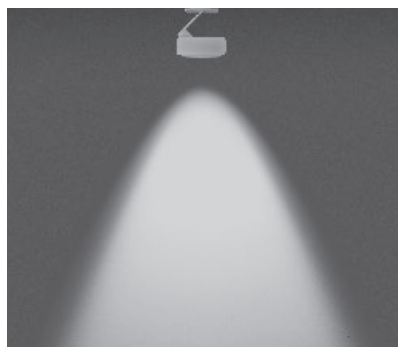


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux:	perfect color	26W	1600lm
	high flux	26W	2190lm
	perfect color	18W	1170lm
	high flux	18W	1600lm

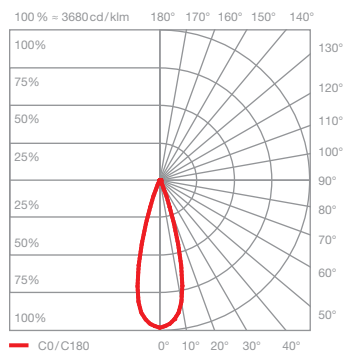

S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux:	perfect color	26W	1560lm
	high flux	26W	2130lm
	perfect color	18W	1140lm
	high flux	18W	1560lm