



UPBEL118
Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

Ratings

- E26 or 2GX11 or GU24 LED
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame



GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser NOT INCLUDED

Type	Article	Colours	Finish	Source
UP	BEL 118 E26	BC white	XX	E26 4 x Max 17W LED or 4 x Max 26W fluo
	BEL 118 FLE	BL electric blue		FLE 2GX11 4x36W - 120Vac
	BEL 118 LED	BW warm white		LED GU24 4x15W - included 120Vac - CRI80 diffused beam - 2700K 6400 lm - 107 lm/W
	GI gold yellow			
	MA brown			
	MT brick red			
		NE black		
		RB burgundy		
		RS red		
		VE green		

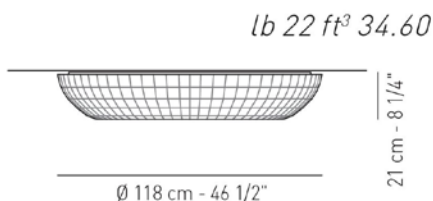

example composition code |UP |BEL118E26 |BW |XX

Available colors



UPBEL118_ _ _ _ _XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.